



## • Hexagonal Spacers Threaded Stud / Threaded Stud - Aluminium



For Custom Stud Lengths  
See 'How to Order'

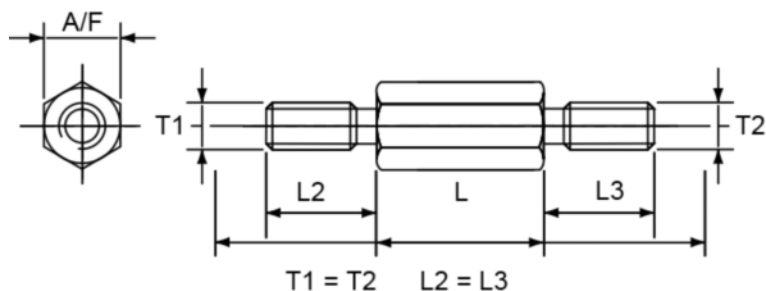

Undercut  
to Din 76-B



Without Undercut  
to Din 76

• ALUMINIUM • ALUMINIUM • ALUMINIUM • ALUMINIUM • ALUMINIUM • ALUMINIUM • ALUMINIUM • ALUMINIUM				
Material: Aluminium 3.1655 / DMS 300				RoHS Compliant
Thread	A/f	L2	Series Code	Available Standard Lengths L ± 0.1 - Any custom length to order
M2.5	5.0	6.0	<b>AA-AL-255060</b>	05 08 10 12 15 18 20 25 30 35 40 45 50
M3	5.5	6.0	<b>AA-AL-305560</b>	05 08 10 12 15 18 20 25 30 35 40 45 50 55 60 65 70
M3	6.0	6.0	<b>AA-AL-306060</b>	05 08 10 12 15 18 20 25 30 35 40 45 50 55 60 65 70
M4	7.0	8.0	<b>AA-AL-407080</b>	05 08 10 12 15 18 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100
M5	8.0	8.0	<b>AA-AL-508080</b>	08 10 12 15 18 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100
M6	10.0	10.0	<b>AA-AL-601010</b>	10 12 15 18 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100
M8	13.0	14.0	<b>AA-AL-801314</b>	15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100

### How to order:-

Select the required Series Code & add required standard or custom body length suffix.  
i.e. AA-AL-305060-20 = body length 'L' of 20mm.

For custom stud length 'L2 = L3' amend code to required custom length.  
i.e. IA-AL-305012-20 = 2 x stud length of 12mm, body length 20mm.

For differing L2 & L3 lengths - contact the sales office.

