


• Hexagonal Spacers Tapped Both Ends - Aluminium

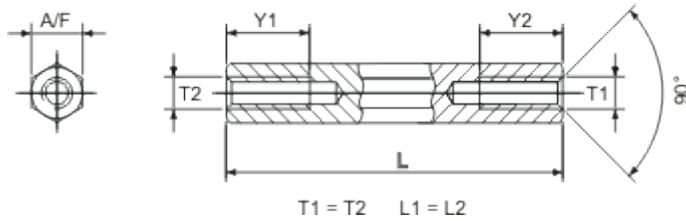

Tapped Depths to Din 76-B Any custom tap depth to order					
L	Y1 at M2.5 +M3	Y1 at M4	Y1 at M5	Y1 at M6	Y1 at M8
5	5	5			
8	8	8	8		
10	10	10	10	10	
12	12	12	12	12	
15	7	15	15	15	15
18	7	9	9	9	18
20	7	9	10	10	20
25	7	9	10	12	12
30+	7	9	10	12	14

• ALUMINIUM • ALUMINIUM • ALUMINIUM • ALUMINIUM • ALUMINIUM • ALUMINIUM •ALUMINIUM •			
Material: Aluminium AlCuBiPb 3.1655			RoHS Compliant
Thread	A/f	Series Code	Available Standard Lengths L ± 0.1 - Any custom length to order
M2.5	5	II-AL-2560	05 08 10 12 15 18 20 25 30 35 40 45 50 55 60
M3.0	5.5	II-AL-3055	05 08 10 12 15 18 20 25 30 35 40 45 50 55 60 65 70
M3	6	II-AL-3060	05 08 10 12 15 18 20 25 30 35 40 45 50 55 60 65 70
M4	7	II-AL-4070	08 10 12 15 18 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100
M5	8	II-AL-5080	10 12 15 18 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100
M6	10	II-AL-6010	10 12 15 18 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100
M8	13	II-AL-8013	15 20 25 30 35 40 45 50 60 70 80 90 100

How to Order:-

Select the required Series Code & add the required standard or custom body length suffix:-
 II-AL-3050-20 - body length of 20mm

